


Gasket Tool Kit, 13-5/8" to 18-3/4"

GASKET TOOLS

Product Number:
ITH-0016-DR-0000-00

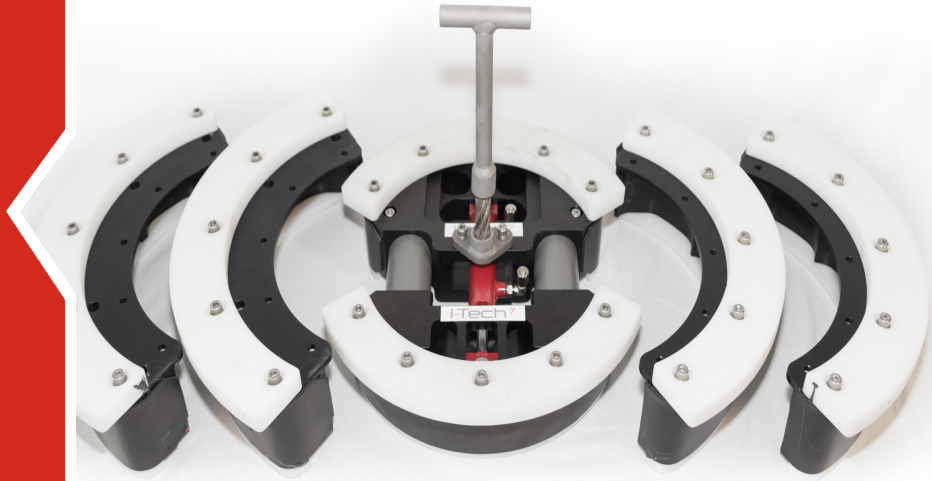

This (internal grip) Gasket Tool was designed to remove and install AX/VX gaskets (seal rings) without metal-to-metal contact between tool and sealing faces of both gasket and wellhead.

With over 200 pounds of mechanical force, the Gasket Tool maintains a firm grip on the internal face of the gasket in the event of hydraulic failure. An adapter shoe system allows the tool to be configured for 13-5/8", 16-3/4" or 18-3/4" gaskets.

The Gasket Tool includes the 13-5/8" Gasket Tool, a set of adapter shoes for the 16-3/4" configuration, a set of adapter shoes for the 18-3/4" configuration, a Pressure Reducing/Relieving Valve, hoses, case, and manual. Optional handle types may also be provided.

- Lightweight design.
- Adjusts to interface with 13-5/8", 16-3/4" or 18-3/4" AX or VX gaskets.
- Strong holding force to retain a positive grip of the gasket.
- Plastic and rubber shoe material to remove any risk of damage to the gasket.

| | |
|---------------------------------------|---|
| Product Number | ITH-0016-DR-0000-00 |
| Materials | Anodized AL 6061-T6 or AL 6082-T6, coated stainless springs, marine cylinder, Buna-N, Acetal |
| Weight in Air | 13.4 to 19.25 kg (29.5 to 42.4 lbs) |
| Weight in Seawater | 9 to 12.2 kg (19.8 to 26.9 lbs) |
| Working Pressure | 48-55 bar (700-800 psi) |
| 13-5/8" Config Extended Dimensions | 16.7 x 14.5 x 13.8" (423 x 368 x 350mm) |
| 16-3/4" Config Extended Dimensions | 19.8 x 17.0 x 14.3" (503 x 432 x 363mm) |
| 18-3/4" Config Extended Dimensions | 21.8 x 18.6 x 14.3" (553 x 473 x 363mm) |
| Hydraulic Connections | 1/4" Swage x 2 Notes and Disclaimers: Weight in air is calculated from computer models. Weight of water is calculated with conservative estimate of 61 lbs/ft3. Exact material specs may be withheld. All welding is performed as per AWS 1.6. |

