
CUTTING AND GRINDING

Product Number: TBC

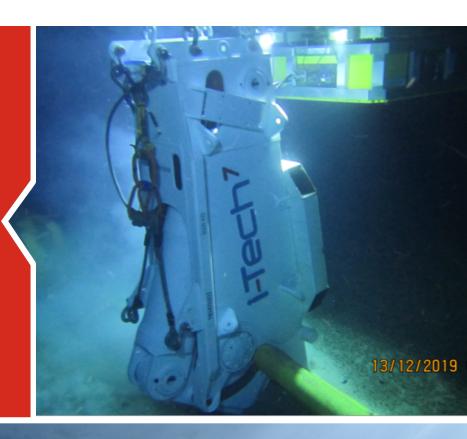

Subsea 7 Shear cutter is used for performing scrap cuts on materials up to 558mm OD (22") for example it can be used to cut various types of structures, rigid and flexible pipelines, umbilical's, tubing, H/I beams and casings. We can perform cuts using both topside control with downlines, or ROV supply using hotstabs. The shear is fitted with multiple rigging points for various horizontal and vertical cutting positions.

- Wide range cutting capability 0 to 558mm (22") OD
- Vertical or Horizontal cutting arrangements
- Cuts a variety of materials with or without coatings
- Topside or ROV control options available
- Fast cutting times to save on vessel campaign times
- Vertical deployment frame optional
- ROV Hotstab option with intensifier skid optional

Subsea Shear Cutter



Cutting Capacity

Pipe

558mm (22") OD

Weight in Air

9500kg

Dimensions

4368 x 2008 x 1746mm

Jaw Opening

978mm (38.5")

Jaw Depth

Hydraulic Requirements

100 ltr/min @ 350 BAR

